


OAL	440	WL	600
CL	355	Mark 1	DIRTECH + lot
AL	350	Mark 2	DC220V1500W 355BfH1

Lighting profile

Distance: 25 mm  
Voltage: 220V

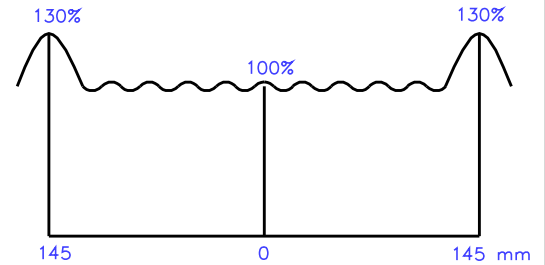

Wire: SILIFLON UL 1727 AWG 18 600V 250°C (white)  
OMERIN or equivalent

Terminal: Splice RSB 7792.002V-1.5 STOCKO or equivalent

Specifications:

Nominal voltage: 220 V

Wattage: 1500 W ± 5%

Average life: 5000 Hrs (with AC power supply, 50 or 60 Hz,  
continuously at room temperature and free from vibration)


Lighting position: Horizontal ± 4°

Tc 2450 K

Segmented filament

Strength test:

- Wire harness shall withstand tensile load of 5 Kgf

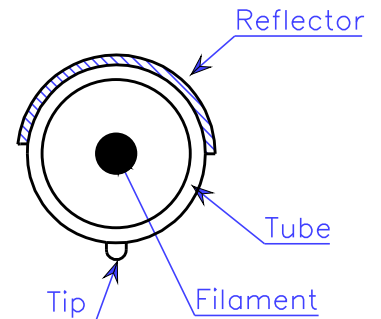

Type: InfraRed Halogen Heater Lamp  
DC 220V 1500W 355 BfH1

Modif.:

Date:

Date:  
17-03-15

DIRTECH

Version  
IC-461

Comments